

DETROIT RADIANT PRODUCTS CO.

Lux Pro PSP-602 Thermostat



Range
45°F to 90°F

Differential
0.6°F to 1.6°F

Contact Action
Opens on rise

Electrical Rating
24 VAC max
Millivolt control 1.0
AMP max


Dimensions
Height: 2.75"
Width: 4.5"
Depth: 2.35"

Operation
Two-stage
Low voltage
Millivolt


Additional Features

-Separate 5-day (weekday) and 2-day (weekend) programming.

TYPICAL WIRING DIAGRAMS

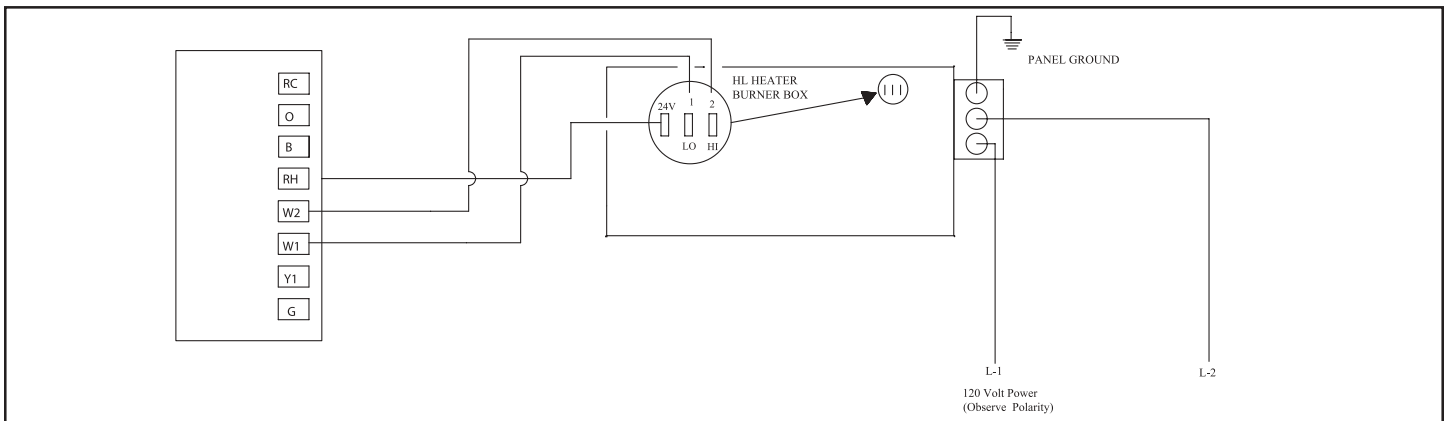

Two-stage heaters with a PSP-602 thermostat. Single heater, single thermostat. No HLRB (relay board) is installed.

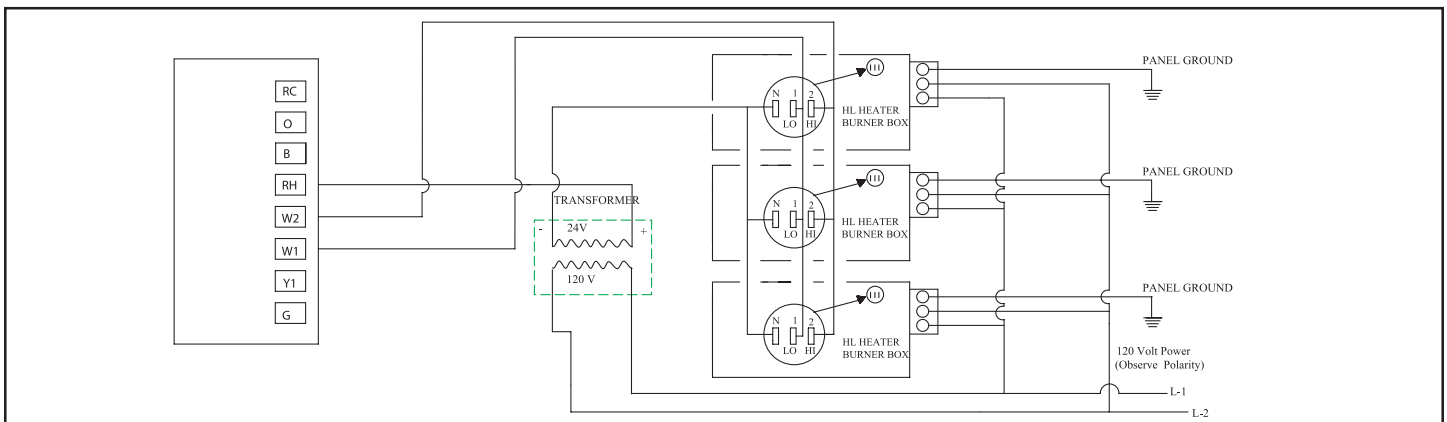

Two-stage heaters with a PSP-602 thermostat. Single heater, single thermostat. HLRB (relay boards) are installed.



Printed in U.S.A.

© 2006 Detroit Radiant Products Co.

21400 Hoover Rd., Warren, MI 48089

T. (586) 756-0950 F. (586) 756-2626

www.detroitradiant.com

Form# LSH043-1/06 (DRP)